

MWPTT

MICRO WIRELESS PUSH-TO-TALK

JAN 2015



OVERVIEW

The SilynX Micro Wireless Push-to-Talk (MWPTT) enables users to remotely and wirelessly PTT their comms devices. Pair the MWPTT with a SilynX control box in seconds, and it will PTT up to two devices, including radios, smartphones, and various ICS platforms. With an optional 2.5mm jack, the MWPTT supports a removable ring finger PTT, ideal for snipers and airborne operations.



- PRIMARY / SECONDARY PTT
- PLUG AND PLAY SIMPLICITY
- 20M IMMERSIBLE
- RING FINGER PTT (OPTIONAL)
- INTERNAL AAA BATTERY (REPLACEABLE)





GSA Contract GS-07F-5965P

"This advertisement is neither paid for nor sponsored, in whole or in part, by any element of the United States Government."
(GSAM 552.203-71 RESTRICTION ON ADVERTISING (SEP 1999))

1.866.325.1731 | info@silynxc.com
9901 Belward Campus Drive Suite 150
Rockville, MD 20850 USA
www.silynxc.com

MWPTT

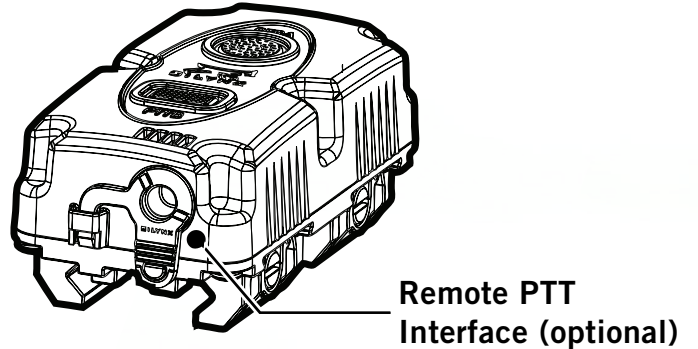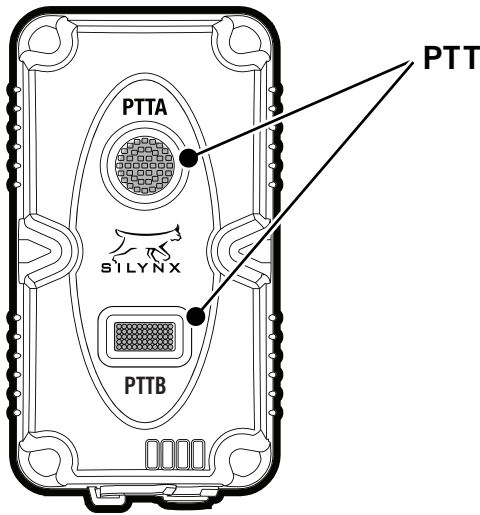

TECH SPECS

Wireless

RF Transceiver..... 2.4 GHz IEEE 802.15.4
 Protocol..... ZigBee 2006
 Range..... 2m

Power Source

MWPTT..... Internal 1.5V AAA Battery

Mounting

Picatinny rail mount
 Optional wrist strap

Environmental

Operating Temperature..... -31 C to +70 C
 Storage Temperature..... -40 C to +75 C
 Humidity..... 95% at ambient temp range +30 to +60 C
 Altitude..... 40,000 ft
 Immersion..... 20m for 2hr

Dimensions

MWPTT..... 2.50" L x 1.35" W x 0.80" H

Weight

MWPTT..... 44.38g (including battery)

**Specifications are subject to change without notice*

