



SILYNX. PROTECTION FROM WITHIN

U94 CHEST PTT




OVERVIEW

The Silynx U94 is a rugged, light-weight single-com push-to-talk (PTT). The U94 can be configured for use with a variety of tactical radios and, with standard NEXUS connectivity, the U94 is compatible with a wide range of tactical headsets. The U94 can be used with an optional gas mask adaptor cable and the heavy duty mounting clip can be configured for either left or right hand use. The Silynx U94 is a versatile, durable, and reliable PTT system.

Silynx offers two configurations. The U94 is the traditional “black box” that has been fielded for decades. Ultra rugged with a single push-to-talk (PTT) button. The U94-S is Silynx’s take on the traditional U94; smaller, lighter, with two PTT buttons for ambidextrous operation.

TECH SPECS

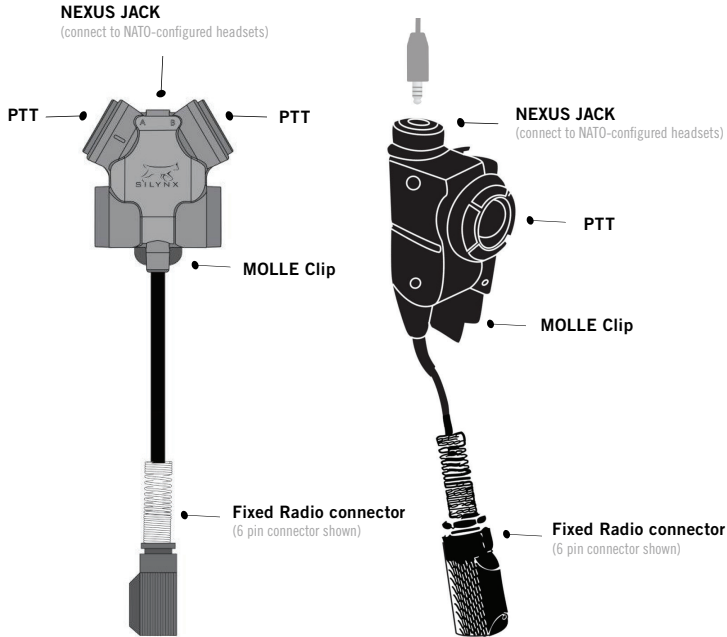

U94 CHEST PTT

* Specifications subject to change without notice

	U94-S	U94
Weight	150g	
PTT	Dual Ambidextrous	Single Switch Clip for L/R Control
Gas Mask Jack		Optional
Control Box Height	1.75"	2.5"
Color	Desert Tan or Black	Black
Headset Interface	Nexus Single Comm Jack	
Radio Interface	U329 6 pin Connector, Motorola APX Series, Motorola XTS Series	
Audio	Audio passes between headset and radio	
Mounting	MOLLE Vest	
Environmental		
Operating Temperature	-31°C to +70°C	
Storage Temperature	-40°C to +75°C	
Humidity	95% at ambient temp range +30°C to +60°C	
Altitude	40,000ft	
Immersion	2m for 30 min	